
NORLEG

 Robinia Multi Swing

 LE no. 20254
 MAIN DRAWING
 scale : 1:100/1:75

DATE REV. **21.05.2007** E: 09.01.2013

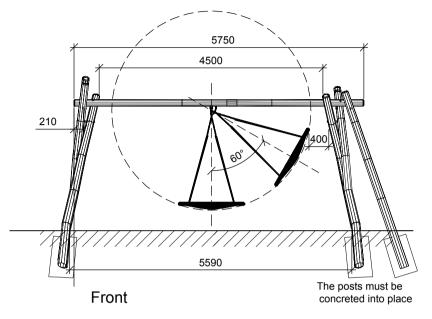

Girder diameter = 250 mm

Legs diameter=160/180

Assemble legs-girder in accordance with Assembly Principle 2. Side assembly.


Mount swing suspension in accordance with Assembly Principle 39.


Foundation and marking Assembly Principle 19.

Locking pipe diameter=38 x 120 mm w/tip 38. Placed between the legs on the underside ____ of the girder. To prevent head entrapment.

Concrete required: 3 sacks of dry concrete/hole

Height of fall: 1.5 m



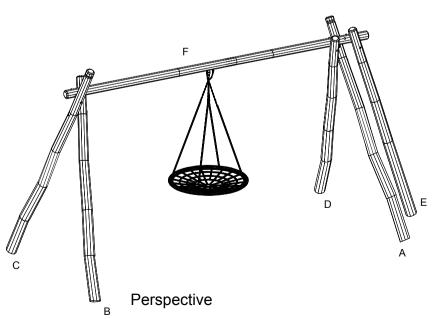

Legs:
A: 3700
B: 3600
C: 3900
D: 3600
E: 3600
Ginder:
E: 5750

